






## BOQA® Fastening Elements product group 3400 for shaft diameter = 15.00 mm

### Technical Data (general)

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Material</b>        | : Preferably stainless steel<br>1.4104 (X12CrMoS17) or<br>1.4305 (X10CrNiS18 9) according to<br>DIN 17 440 (other suitable materials<br>upon request) |
| <b>Cocentricity</b>    | : Cocentricity tolerance approx.<br>0,01 mm                                                                                                           |
| <b>Surface quality</b> | : $R_a = 3,2 \mu\text{m}$ (shaft)<br>$R_a = 1,6 \mu\text{m}$ (taper)                                                                                  |
| <b>Seat (bore)</b>     | : $d1 = H7$ (at the unslotted part)                                                                                                                   |

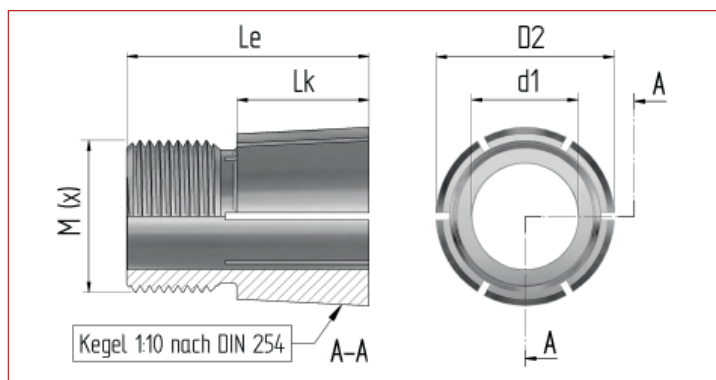

### Technical Data (individual)

| Fastening Element BOQA® Article-No.: | 10057k-15 | 10057k-15-ISK | 10057-15  | 10057-15-ISK | 10058-15  | 10058-15-ISK |
|--------------------------------------|-----------|---------------|-----------|--------------|-----------|--------------|
| for shaft diameters ( $d1$ )         | mm        | 15,00         | 15,00     | 15,00        | 15,00     | 15,00        |
| Hub width (B) max.                   | mm        | 16,00         | 16,00     | 22,00        | 22,00     | 28,00        |
| Taper diameter front (D2)            | mm        | 34,00         | 34,00     | 34,00        | 34,00     | 34,00        |
| Taper length ( $L_k$ )               | mm        | 12,50         | 12,50     | 18,60        | 18,60     | 23,70        |
| Counter bearing, length              | mm        | -             | -         | -            | -         | -            |
| Counter bearing, diameter            | mm        | -             | -         | -            | -         | -            |
| Bore depth for shaft journal         | mm        | -             | -         | -            | -         | -            |
| Overall length ( $L_e$ )             | mm        | 26,00         | 26,00     | 33,30        | 33,30     | 38,40        |
| Taper ratio (C)                      | C=1:x     | 1:10          | 1:10      | 1:10         | 1:10      | 1:10         |
| Taper angle ( $\alpha$ )             | °         | 5,725         | 5,725     | 5,725        | 5,725     | 5,725        |
| Thread (metric DIN)                  | M (x)     | M30 x 1,5     | M30 x 1,5 | M30 x 1,5    | M30 x 1,5 | M30 x 1,5    |
| Hex socket key width (SW)            | mm        | -             | 10 mm     | -            | 10 mm     | -            |

### Fastening Nut (standard similar to DIN 439 or DIN 936, galvanised steel / stainless steel for an additional charge)

|                                             |       |           |           |           |           |           |           |
|---------------------------------------------|-------|-----------|-----------|-----------|-----------|-----------|-----------|
| Thread (metric DIN)                         | M (x) | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 |
| Key width (SW)                              | mm    | 36        | 36        | 36        | 36        | 36        | 36        |
| Nut height (m)                              | mm    | 10,00     | 10,00     | 10,00     | 10,00     | 10,00     | 10,00     |
| Recommended tightening torque <sup>1)</sup> | Nm    | 115,00    | 115,00    | 120,00    | 120,00    | 125,00    | 125,00    |

### Transmission Values <sup>2)</sup>

|                    |                   |       |       |       |       |       |       |
|--------------------|-------------------|-------|-------|-------|-------|-------|-------|
| Torque ( $M$ )     | Nm                | 70,20 | 70,20 | 73,20 | 73,20 | 76,30 | 76,30 |
| Thrust ( $F_E$ )   | kN                | 2,81  | 2,81  | 2,96  | 2,96  | 3,11  | 3,11  |
| Hub load ( $p_F$ ) | N/mm <sup>2</sup> | 32,06 | 32,06 | 22,90 | 22,90 | 19,01 | 19,01 |


- Values provided for the tightening torque of the nut for BOQA® fastening elements are recommended values only and lie within the lower third of the permissible range. Optimal tightening torque values for each case should be determined empirically, and should be stated explicitly in the assembly instructions.
- The table values for the individual performance statistics are derived from the standard combination of steel shaft and aluminium hub (e.g., belt pulley) and therefore take the lower yield strength ( $R_e$ ) of the hub material into account. Values for the permissible surface pressure are based upon estimated for increasing loads. All stated values are approximate reference values. Actual performance data are determined by factors not within our control, such as shaft/hub material properties, surface quality of the shaft and bore inside the hub, permitted manufacturing tolerances, hub length, the actual tightening torque of the BOQA® fastening element fastening nut, etc..

BOQA® fastening elements are available in various lengths based on commercially available belt pulley widths and customised designs.



| Article-No.: | 10057k-15 | 10057k-15-ISK | 10057-15 | 10057-15-ISK | 10058-15 | 10058-15-ISK |
|--------------|-----------|---------------|----------|--------------|----------|--------------|
|--------------|-----------|---------------|----------|--------------|----------|--------------|

The use of BOQA® fastening elements offers a series of alternatives for complex shaft-to-hub connections with a significant impact on easier assembly/disassembly, reliability and longevity of drive components.

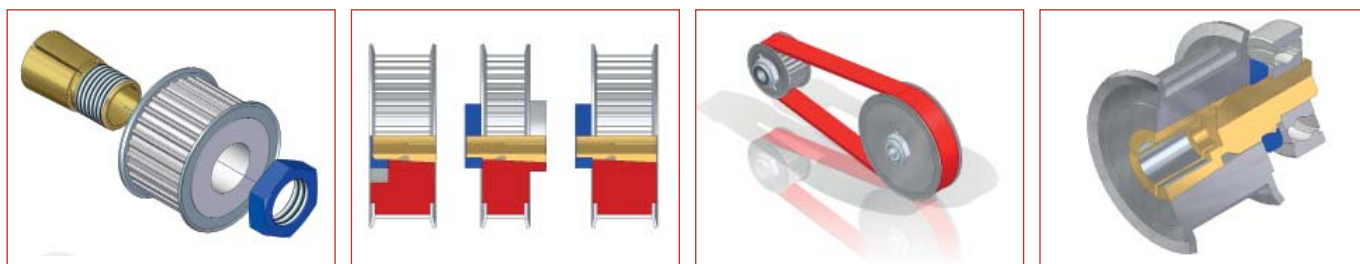




DBGM : 94 07 845 / 94 10 725  
DBP : 44 16 292.8  
BodaTec-Form-Nr.: boqa2016.idd  
© Georg F. Boda : bodaTec® GmbH 72648

## BOQA® Fastening Elements product group 3400 for shaft diameter = 16.00 mm

### Technical Data (general)

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Material</b>        | : Preferably stainless steel<br>1.4104 (X12CrMoS17) or<br>1.4305 (X10CrNiS18 9) according to<br>DIN 17 440 (other suitable materials<br>upon request) |
| <b>Cocentricity</b>    | : Concentricity tolerance approx.<br>0,01 mm                                                                                                          |
| <b>Surface quality</b> | : $R_a = 3,2 \mu\text{m}$ (shaft)<br>$R_a = 1,6 \mu\text{m}$ (taper)                                                                                  |
| <b>Seat (bore)</b>     | : $d1 = H7$ (at the unslotted part)                                                                                                                   |

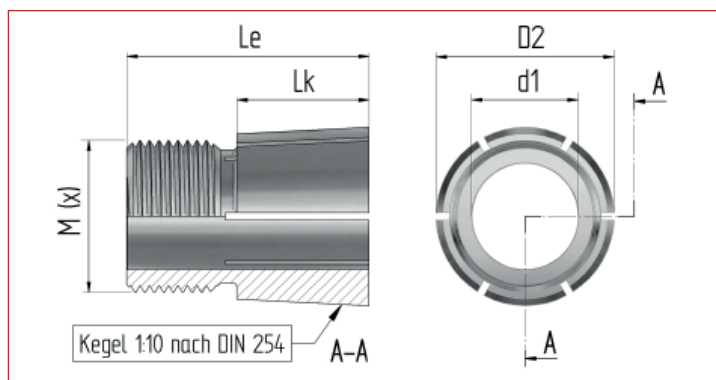

### Technical Data (individual)

| <b>Fastening Element BOQA®</b> Article-No.: |       | <b>10065</b> | <b>10065-ISK</b> | <b>10065L</b> | <b>10065L-ISK</b> |
|---------------------------------------------|-------|--------------|------------------|---------------|-------------------|
| for shaft diameters (d1)                    | mm    | 16,00        | 16,00            | 16,00         | 16,00             |
| Hub width (B) max.                          | mm    | 35,00        | 35,00            | 40,00         | 40,00             |
| Taper diameter front (D2)                   | mm    | 34,00        | 34,00            | 34,00         | 34,00             |
| Taper length (L <sub>k</sub> )              | mm    | 28,20        | 28,20            | 33,50         | 33,50             |
| Counter bearing, length                     | mm    | -            | -                | -             | -                 |
| Counter bearing, diameter                   | mm    | -            | -                | -             | -                 |
| Bore depth for shaft journal                | mm    | -            | -                | -             | -                 |
| Overall length (L <sub>e</sub> )            | mm    | 46,00        | 46,00            | 51,50         | 51,50             |
| Taper ratio (C)                             | C=1:x | 1:10         | 1:10             | 1:10          | 1:10              |
| Taper angle (α)                             | °     | 5,725        | 5,725            | 5,725         | 5,725             |
| Thread (metric DIN)                         | M (x) | M30 x 1,5    | M30 x 1,5        | M30 x 1,5     | M30 x 1,5         |
| Hex socket key width (SW)                   | mm    | -            | 10 mm            | -             | 10 mm             |

### Fastening Nut (standard similar to DIN 439 or DIN 936, galvanised steel / stainless steel for an additional charge)

|                                             |       |           |           |           |           |
|---------------------------------------------|-------|-----------|-----------|-----------|-----------|
| Thread (metric DIN)                         | M (x) | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 |
| Key width (SW)                              | mm    | 36        | 36        | 36        | 36        |
| Nut height (m)                              | mm    | 10,00     | 10,00     | 10,00     | 10,00     |
| Recommended tightening torque <sup>1)</sup> | Nm    | 135,00    | 135,00    | 140,00    | 140,00    |

### Transmission Values <sup>2)</sup>

|                    |                   |       |       |       |       |
|--------------------|-------------------|-------|-------|-------|-------|
| Torque (M)         | Nm                | 82,40 | 82,40 | 85,40 | 85,40 |
| Thrust ( $F_E$ )   | kN                | 3,38  | 3,38  | 3,53  | 3,53  |
| Hub load ( $p_F$ ) | N/mm <sup>2</sup> | 17,50 | 17,50 | 15,53 | 15,53 |


- Values provided for the tightening torque of the nut for BOQA® fastening elements are recommended values only and lie within the lower third of the permissible range. Optimal tightening torque values for each case should be determined empirically, and should be stated explicitly in the assembly instructions.
- The table values for the individual performance statistics are derived from the standard combination of steel shaft and aluminium hub (e.g., belt pulley) and therefore take the lower yield strength ( $R_e$ ) of the hub material into account. Values for the permissible surface pressure are based upon estimated for increasing loads. All stated values are approximate reference values. Actual performance data are determined by factors not within our control, such as shaft/hub material properties, surface quality of the shaft and bore inside the hub, permitted manufacturing tolerances, hub length, the actual tightening torque of the BOQA® fastening element fastening nut, etc..

BOQA® fastening elements are available in various lengths based on commercially available belt pulley widths and customised designs.



|                     |       |           |        |            |
|---------------------|-------|-----------|--------|------------|
| <b>Article-No.:</b> | 10065 | 10065-ISK | 10065L | 10065L-ISK |
|---------------------|-------|-----------|--------|------------|

The use of BOQA® fastening elements offers a series of alternatives for complex shaft-to-hub connections with a significant impact on easier assembly/disassembly, reliability and longevity of drive components.

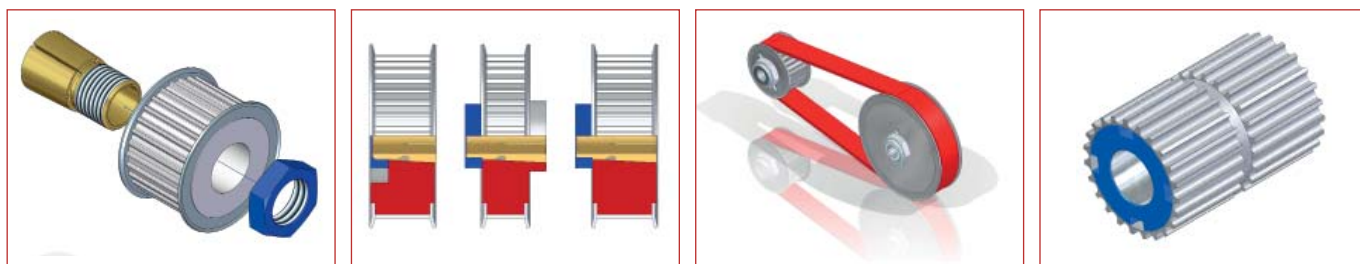


## Page 134

## BOQA® Fastening Elements product group 3400 for shaft diameter = 17.00 mm

### Technical Data (general)

|                        |                                                                                                                                                     |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Material</b>        | Preferably stainless steel<br>1.4104 (X12CrMoS17) or<br>1.4305 (X10CrNiS18 9) according to<br>DIN 17 440 (other suitable materials<br>upon request) |
| <b>Cocentricity</b>    | Concentricity tolerance approx.<br>0,01 mm                                                                                                          |
| <b>Surface quality</b> | Ra = 3,2 µm (shaft)<br>Ra = 1,6 µm (taper)                                                                                                          |
| <b>Seat (bore)</b>     | d1 = H7 (at the unslotted part)                                                                                                                     |

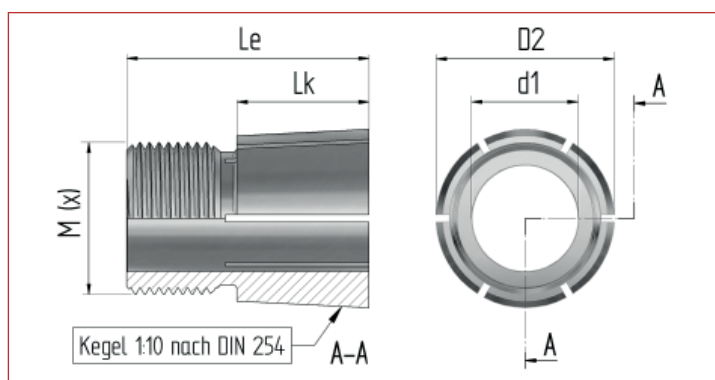

### Technical Data (individual)

| Fastening Element BOQA® Article-No.: | 10068     | 10068-ISK | 10068L    | 10068L-ISK |
|--------------------------------------|-----------|-----------|-----------|------------|
| for shaft diameters (d1) .....       | 17,00     | 17,00     | 17,00     | 17,00      |
| Hub width (B) max. ....              | 35,00     | 35,00     | 40,00     | 40,00      |
| Taper diameter front (D2) .....      | 34,00     | 34,00     | 34,00     | 34,00      |
| Taper length (L <sub>k</sub> ) ..... | 28,20     | 28,20     | 33,50     | 33,50      |
| Counter bearing, length .....        | -         | -         | -         | -          |
| Counter bearing, diameter .....      | -         | -         | -         | -          |
| Bore depth for shaft journal .....   | -         | -         | -         | -          |
| Overall length (Le) .....            | 46,00     | 46,00     | 51,50     | 51,50      |
| Taper ratio (C) .....                | C=1:x     | 1:10      | 1:10      | 1:10       |
| Taper angle (α) .....                | 5,725     | 5,725     | 5,725     | 5,725      |
| Thread (metric DIN) .....            | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 | M30 x 1,5  |
| Hex socket key width (SW) .....      | -         | 10 mm     | -         | 10 mm      |

### Fastening Nut (standard similar to DIN 439 or DIN 936, galvanised steel / stainless steel for an additional charge)

|                                                      |           |           |           |           |
|------------------------------------------------------|-----------|-----------|-----------|-----------|
| Thread (metric DIN) .....                            | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 |
| Key width (SW) .....                                 | 36        | 36        | 36        | 36        |
| Nut height (m) .....                                 | 10,00     | 10,00     | 10,00     | 10,00     |
| Recommended tightening torque <sup>1)</sup> Nm ..... | 140,00    | 140,00    | 145,00    | 145,00    |

### Transmission Values <sup>2)</sup>

|                                |                   |       |       |       |       |
|--------------------------------|-------------------|-------|-------|-------|-------|
| Torque (M) .....               | Nm                | 85,40 | 85,40 | 88,50 | 88,50 |
| Thrust (F <sub>e</sub> ) ..... | kN                | 3,51  | 3,51  | 3,66  | 3,66  |
| Hub load (pF) .....            | N/mm <sup>2</sup> | 18,15 | 18,15 | 16,08 | 16,08 |


- Values provided for the tightening torque of the nut for BOQA® fastening elements are recommended values only and lie within the lower third of the permissible range. Optimal tightening torque values for each case should be determined empirically, and should be stated explicitly in the assembly instructions.
- The table values for the individual performance statistics are derived from the standard combination of steel shaft and aluminium hub (e.g., belt pulley) and therefore take the lower yield strength (Re) of the hub material into account. Values for the permissible surface pressure are based upon estimated for increasing loads. All stated values are approximate reference values. Actual performance data are determined by factors not within our control, such as shaft/hub material properties, surface quality of the shaft and bore inside the hub, permitted manufacturing tolerances, hub length, the actual tightening torque of the BOQA® fastening element fastening nut, etc..

BOQA® fastening elements are available in various lengths based on commercially available belt pulley widths and customised designs.



| Article-No.: | 10068 | 10068-ISK | 10068L | 10068L-ISK |
|--------------|-------|-----------|--------|------------|
|--------------|-------|-----------|--------|------------|

The use of BOQA® fastening elements offers a series of alternatives for complex shaft-to-hub connections with a significant impact on easier assembly/disassembly, reliability and longevity of drive components.

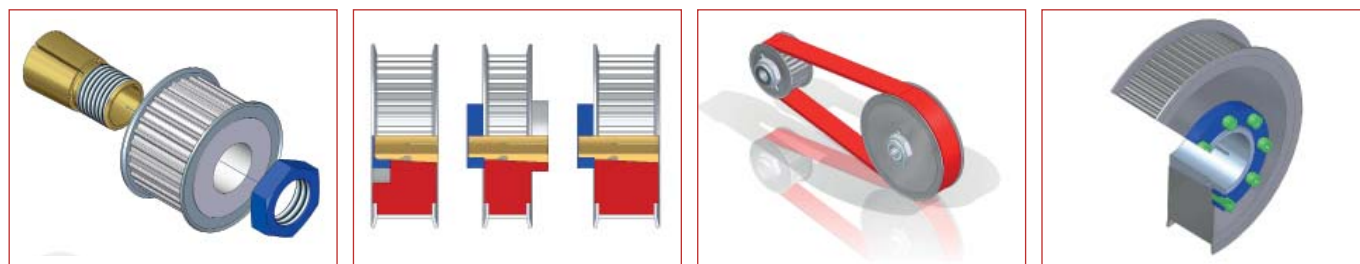


DBGM : 94 07 845 / 94 10 725  
DBP : 44 16 292.8  
BodaTec-Form-Nr.: boqa2016.idd  
© Georg F. Boda : bodaTec® GmbH 72648

## BOQA® Fastening Elements product group 3400 for shaft diameter = 18.00 mm

### Technical Data (general)

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Material</b>        | : Preferably stainless steel<br>1.4104 (X12CrMoS17) or<br>1.4305 (X10CrNiS18 9) according to<br>DIN 17 440 (other suitable materials<br>upon request) |
| <b>Cocentricity</b>    | : Cocentricity tolerance approx.<br>0,01 mm                                                                                                           |
| <b>Surface quality</b> | : $R_a = 3,2 \mu\text{m}$ (shaft)<br>$R_a = 1,6 \mu\text{m}$ (taper)                                                                                  |
| <b>Seat (bore)</b>     | : $d1 = H7$ (at the unslotted part)                                                                                                                   |

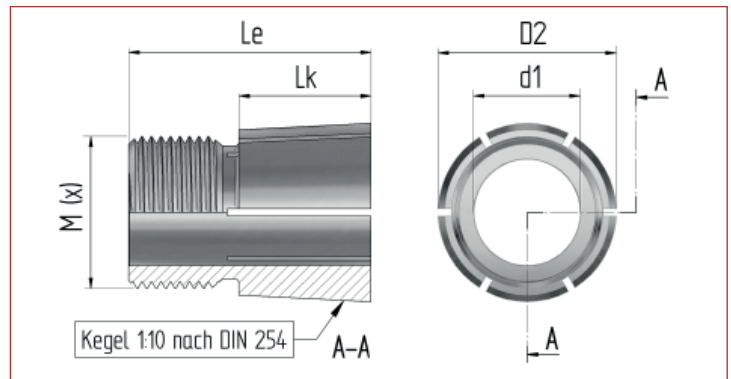

### Technical Data (individual)

| <b>Fastening Element BOQA®</b> Article-No.: |             | <b>10071</b>    | <b>10071-ISK</b> | <b>10071L</b>   | <b>10071L-ISK</b> |
|---------------------------------------------|-------------|-----------------|------------------|-----------------|-------------------|
| for shaft diameters (d1) .....              | mm .....    | 18,00 .....     | 18,00 .....      | 18,00 .....     | 18,00 .....       |
| Hub width (B) max .....                     | mm .....    | 35,00 .....     | 35,00 .....      | 40,00 .....     | 40,00 .....       |
| Taper diameter front (D2) .....             | mm .....    | 34,00 .....     | 34,00 .....      | 34,00 .....     | 34,00 .....       |
| Taper length (L <sub>k</sub> ) .....        | mm .....    | 28,20 .....     | 28,20 .....      | 33,50 .....     | 33,50 .....       |
| Counter bearing, length .....               | mm .....    | - .....         | - .....          | - .....         | - .....           |
| Counter bearing, diameter .....             | mm .....    | - .....         | - .....          | - .....         | - .....           |
| Bore depth for shaft journal .....          | mm .....    | - .....         | - .....          | - .....         | - .....           |
| Overall length (L <sub>e</sub> ) .....      | mm .....    | 46,00 .....     | 46,00 .....      | 51,50 .....     | 51,50 .....       |
| Taper ratio (C) .....                       | C=1:x ..... | 1:10 .....      | 1:10 .....       | 1:10 .....      | 1:10 .....        |
| Taper angle (α) .....                       | ° .....     | 5,725 .....     | 5,725 .....      | 5,725 .....     | 5,725 .....       |
| Thread (metric DIN) .....                   | M (x) ..... | M30 x 1,5 ..... | M30 x 1,5 .....  | M30 x 1,5 ..... | M30 x 1,5 .....   |
| Hex socket key width (SW) .....             | mm .....    | - .....         | 10 mm .....      | - .....         | 10 mm .....       |

### Fastening Nut (standard similar to DIN 439 or DIN 936, galvanised steel / stainless steel for an additional charge)

|                                             |       |           |           |           |           |
|---------------------------------------------|-------|-----------|-----------|-----------|-----------|
| Thread (metric DIN)                         | M (x) | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 |
| Key width (SW)                              | mm    | 36        | 36        | 36        | 36        |
| Nut height (m)                              | mm    | 10,00     | 10,00     | 10,00     | 10,00     |
| Recommended tightening torque <sup>1)</sup> | Nm    | 145,00    | 145,00    | 150,00    | 150,00    |

### Transmission Values <sup>2)</sup>

|                    |                   |       |       |       |       |
|--------------------|-------------------|-------|-------|-------|-------|
| Torque (M)         | Nm                | 88,50 | 88,50 | 91,50 | 91,50 |
| Thrust ( $F_E$ )   | kN                | 3,63  | 3,63  | 3,79  | 3,79  |
| Hub load ( $p_F$ ) | N/mm <sup>2</sup> | 18,79 | 18,79 | 16,63 | 16,63 |


- Values provided for the tightening torque of the nut for BOQA® fastening elements are recommended values only and lie within the lower third of the permissible range. Optimal tightening torque values for each case should be determined empirically, and should be stated explicitly in the assembly instructions.
- The table values for the individual performance statistics are derived from the standard combination of steel shaft and aluminium hub (e.g., belt pulley) and therefore take the lower yield strength ( $R_e$ ) of the hub material into account. Values for the permissible surface pressure are based upon estimated for increasing loads. All stated values are approximate reference values. Actual performance data are determined by factors not within our control, such as shaft/hub material properties, surface quality of the shaft and bore inside the hub, permitted manufacturing tolerances, hub length, the actual tightening torque of the BOQA® fastening element fastening nut, etc..

BOQA® fastening elements are available in various lengths based on commercially available belt pulley widths and customised designs.



|                     |       |           |        |            |
|---------------------|-------|-----------|--------|------------|
| <b>Article-No.:</b> | 10071 | 10071-ISK | 10071L | 10071L-ISK |
|---------------------|-------|-----------|--------|------------|


The use of BOQA® fastening elements offers a series of alternatives for complex shaft-to-hub connections with a significant impact on easier assembly/disassembly, reliability and longevity of drive components.

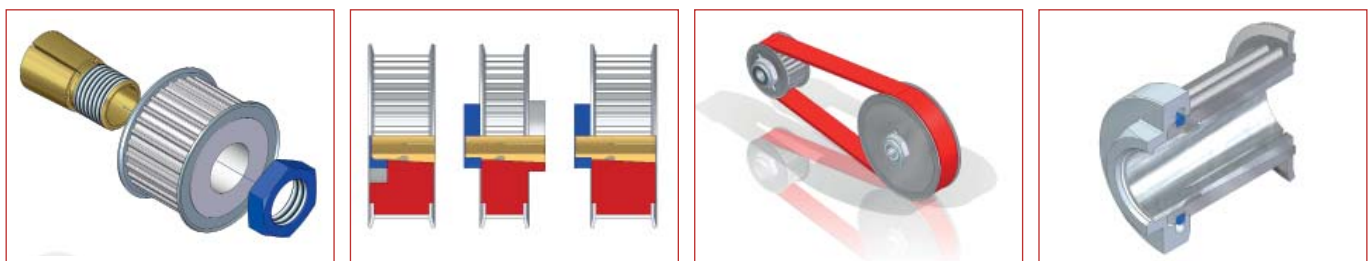

## BOQA® Fastening Elements product group 3400 for shaft diameter = 19.00 mm

### Technical Data (general)

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Material</b>        | : Preferably stainless steel<br>1.4104 (X12CrMoS17) or<br>1.4305 (X10CrNiS18 9) according to<br>DIN 17 440 (other suitable materials<br>upon request) |
| <b>Cocentricity</b>    | : Cocentricity tolerance approx.<br>0,01 mm                                                                                                           |
| <b>Surface quality</b> | : $R_a = 3,2 \mu\text{m}$ (shaft)<br>$R_a = 1,6 \mu\text{m}$ (taper)                                                                                  |
| <b>Seat (bore)</b>     | : $d1 = H7$ (at the unslotted part)                                                                                                                   |

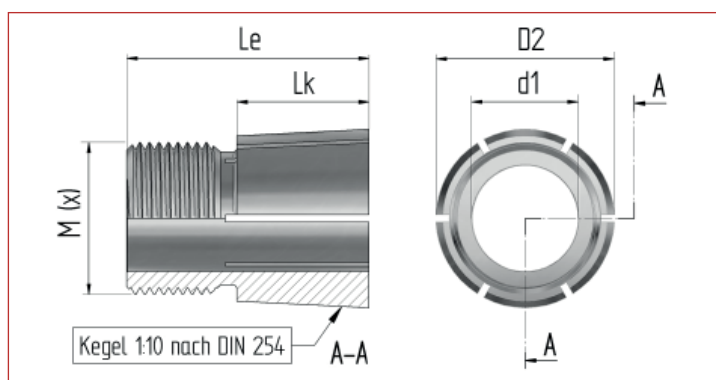

### Technical Data (individual)

| Fastening Element BOQA® Article-No.: | 10072k          | 10072k-ISK      | 10072           | 10072-ISK       | 10073           | 10073-ISK       |
|--------------------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| for shaft diameters ( $d1$ )         | mm 19,00        | mm 19,00        | mm 19,00        | mm 19,00        | mm 19,00        | mm 19,00        |
| Hub width (B) max.                   | mm 16,00        | mm 16,00        | mm 22,00        | mm 22,00        | mm 28,00        | mm 28,00        |
| Taper diameter front ( $D2$ )        | mm 34,00        | mm 34,00        | mm 34,00        | mm 34,00        | mm 34,00        | mm 34,00        |
| Taper length ( $L_k$ )               | mm 12,50        | mm 12,50        | mm 18,60        | mm 18,60        | mm 23,70        | mm 23,70        |
| Counter bearing, length              | mm -            | mm -            | mm -            | mm -            | mm -            | mm -            |
| Counter bearing, diameter            | mm -            | mm -            | mm -            | mm -            | mm -            | mm -            |
| Bore depth for shaft journal         | mm -            | mm -            | mm -            | mm -            | mm -            | mm -            |
| Overall length ( $Le$ )              | mm 26,00        | mm 26,00        | mm 33,30        | mm 33,30        | mm 38,40        | mm 38,40        |
| Taper ratio (C)                      | C=1:x 1:10      | C=1:x 1:10      | C=1:x 1:10      | C=1:x 1:10      | C=1:x 1:10      | C=1:x 1:10      |
| Taper angle ( $\alpha$ )             | ° 5,725         | ° 5,725         | ° 5,725         | ° 5,725         | ° 5,725         | ° 5,725         |
| Thread (metric DIN)                  | M (x) M30 x 1,5 | M (x) M30 x 1,5 | M (x) M30 x 1,5 | M (x) M30 x 1,5 | M (x) M30 x 1,5 | M (x) M30 x 1,5 |
| Hex socket key width (SW)            | mm -            | mm 10 mm        | mm -            | mm 10 mm        | mm -            | mm 10 mm        |

### Fastening Nut (standard similar to DIN 439 or DIN 936, galvanised steel / stainless steel for an additional charge)

|                                                |                 |           |           |           |           |           |
|------------------------------------------------|-----------------|-----------|-----------|-----------|-----------|-----------|
| Thread (metric DIN)                            | M (x) M30 x 1,5 | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 |
| Key width (SW)                                 | mm 36           | mm 36     | mm 36     | mm 36     | mm 36     | mm 36     |
| Nut height (m)                                 | mm 10,00        | mm 10,00  | mm 10,00  | mm 10,00  | mm 10,00  | mm 10,00  |
| Recommended tightening torque <sup>1)</sup> Nm | 135,00          | 135,00    | 140,00    | 140,00    | 145,00    | 145,00    |

### Transmission Values <sup>2)</sup>

|                    |                         |                         |                         |                         |                         |                         |
|--------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Torque ( $M$ )     | Nm 82,40                | Nm 82,40                | Nm 85,40                | Nm 85,40                | Nm 88,50                | Nm 88,50                |
| Thrust ( $F_E$ )   | kN 3,30                 | kN 3,30                 | kN 3,46                 | kN 3,46                 | kN 3,61                 | kN 3,61                 |
| Hub load ( $p_F$ ) | N/mm <sup>2</sup> 37,64 | N/mm <sup>2</sup> 37,64 | N/mm <sup>2</sup> 26,72 | N/mm <sup>2</sup> 26,72 | N/mm <sup>2</sup> 22,06 | N/mm <sup>2</sup> 22,06 |


- Values provided for the tightening torque of the nut for BOQA® fastening elements are recommended values only and lie within the lower third of the permissible range. Optimal tightening torque values for each case should be determined empirically, and should be stated explicitly in the assembly instructions.
- The table values for the individual performance statistics are derived from the standard combination of steel shaft and aluminium hub (e.g., belt pulley) and therefore take the lower yield strength ( $R_e$ ) of the hub material into account. Values for the permissible surface pressure are based upon estimated for increasing loads. All stated values are approximate reference values. Actual performance data are determined by factors not within our control, such as shaft/hub material properties, surface quality of the shaft and bore inside the hub, permitted manufacturing tolerances, hub length, the actual tightening torque of the BOQA® fastening element fastening nut, etc..

BOQA® fastening elements are available in various lengths based on commercially available belt pulley widths and customised designs.



| Article-No.: | 10072k | 10072k-ISK | 10072 | 10072-ISK | 10073 | 10073-ISK |
|--------------|--------|------------|-------|-----------|-------|-----------|
|--------------|--------|------------|-------|-----------|-------|-----------|


The use of BOQA® fastening elements offers a series of alternatives for complex shaft-to-hub connections with a significant impact on easier assembly/disassembly, reliability and longevity of drive components.

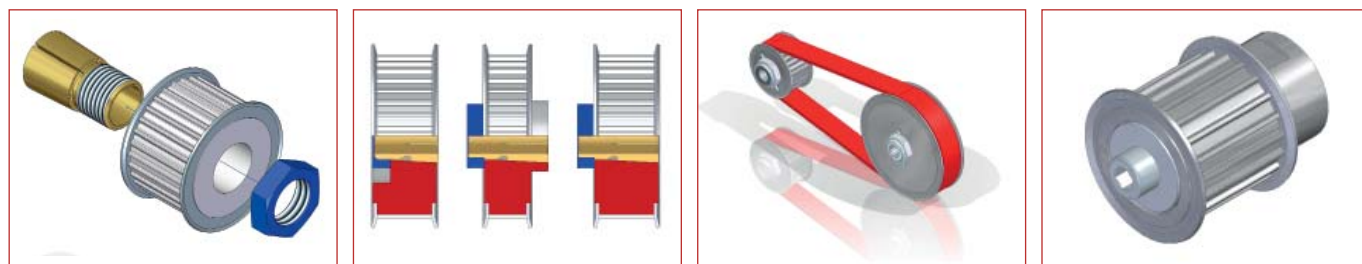

## BOQA® Fastening Elements product group 3400 for shaft diameter = 19.00 mm

### Technical Data (general)

|                        |                                                                                                                                                     |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Material</b>        | Preferably stainless steel<br>1.4104 (X12CrMoS17) or<br>1.4305 (X10CrNiS18 9) according to<br>DIN 17 440 (other suitable materials<br>upon request) |
| <b>Cocentricity</b>    | Concentricity tolerance approx.<br>0,01 mm                                                                                                          |
| <b>Surface quality</b> | Ra = 3,2 µm (shaft)<br>Ra = 1,6 µm (taper)                                                                                                          |
| <b>Seat (bore)</b>     | d1 = H7 (at the unslotted part)                                                                                                                     |

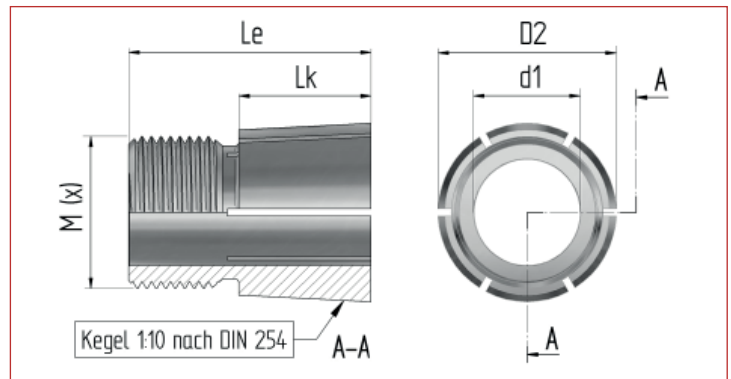

### Technical Data (individual)

|                                             |           |           |           |            |
|---------------------------------------------|-----------|-----------|-----------|------------|
| <b>Fastening Element BOQA®</b> Article-No.: | 10074     | 10074-ISK | 10074L    | 10074L-ISK |
| for shaft diameters (d1) .....              | 19,00     | 19,00     | 19,00     | 19,00      |
| Hub width (B) max. ....                     | 35,00     | 35,00     | 40,00     | 40,00      |
| Taper diameter front (D2) .....             | 34,00     | 34,00     | 34,00     | 34,00      |
| Taper length (L <sub>k</sub> ) .....        | 28,20     | 28,20     | 33,50     | 33,50      |
| Counter bearing, length .....               | -         | -         | -         | -          |
| Counter bearing, diameter .....             | -         | -         | -         | -          |
| Bore depth for shaft journal .....          | -         | -         | -         | -          |
| Overall length (Le) .....                   | 46,00     | 46,00     | 51,50     | 51,50      |
| Taper ratio (C) .....                       | C=1:x     | 1:10      | 1:10      | 1:10       |
| Taper angle (α) .....                       | 5,725     | 5,725     | 5,725     | 5,725      |
| Thread (metric DIN) .....                   | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 | M30 x 1,5  |
| Hex socket key width (SW) .....             | -         | 10 mm     | -         | 10 mm      |

### Fastening Nut (standard similar to DIN 439 or DIN 936, galvanised steel / stainless steel for an additional charge)

|                                                      |           |           |           |           |
|------------------------------------------------------|-----------|-----------|-----------|-----------|
| Thread (metric DIN) .....                            | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 |
| Key width (SW) .....                                 | 36        | 36        | 36        | 36        |
| Nut height (m) .....                                 | 10,00     | 10,00     | 10,00     | 10,00     |
| Recommended tightening torque <sup>1)</sup> Nm ..... | 150,00    | 150,00    | 155,00    | 155,00    |

### Transmission Values <sup>2)</sup>

|                                |                   |       |       |       |       |
|--------------------------------|-------------------|-------|-------|-------|-------|
| Torque (M) .....               | Nm                | 91,50 | 91,50 | 94,60 | 94,60 |
| Thrust (F <sub>e</sub> ) ..... | kN                | 3,76  | 3,76  | 3,91  | 3,91  |
| Hub load (pF) .....            | N/mm <sup>2</sup> | 19,44 | 19,44 | 17,19 | 17,19 |


- Values provided for the tightening torque of the nut for **BOQA®** fastening elements are recommended values only and lie within the lower third of the permissible range. Optimal tightening torque values for each case should be determined empirically, and should be stated explicitly in the assembly instructions.
- The table values for the individual performance statistics are derived from the standard combination of steel shaft and aluminium hub (e.g., belt pulley) and therefore take the lower yield strength (Re) of the hub material into account. Values for the permissible surface pressure are based upon estimated for increasing loads. All stated values are approximate reference values. Actual performance data are determined by factors not within our control, such as shaft/hub material properties, surface quality of the shaft and bore inside the hub, permitted manufacturing tolerances, hub length, the actual tightening torque of the **BOQA®** fastening element fastening nut, etc..

**BOQA®** fastening elements are available in various lengths based on commercially available belt pulley widths and customised designs.



|                           |       |           |        |            |
|---------------------------|-------|-----------|--------|------------|
| <b>Article-No.:</b> ..... | 10074 | 10074-ISK | 10074L | 10074L-ISK |
|---------------------------|-------|-----------|--------|------------|


The use of **BOQA®** fastening elements offers a series of alternatives for complex shaft-to-hub connections with a significant impact on easier assembly/disassembly, reliability and longevity of drive components.

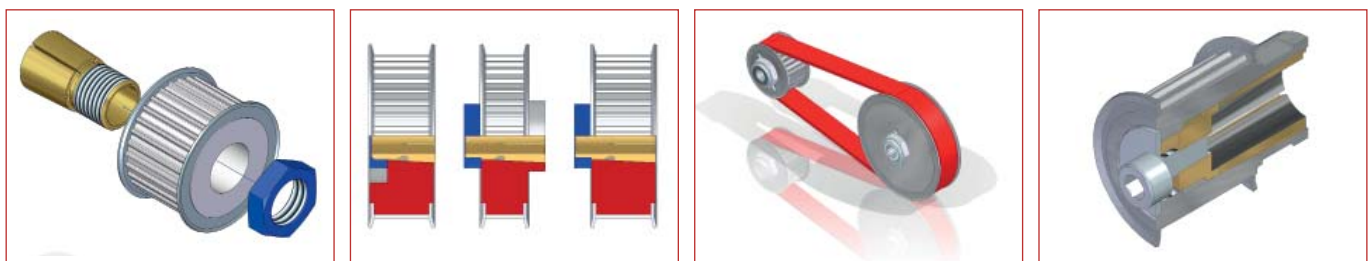

## BOQA® Fastening Elements product group 3400 for shaft diameter = 20.00 mm

### Technical Data (general)

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Material</b>        | : Preferably stainless steel<br>1.4104 (X12CrMoS17) or<br>1.4305 (X10CrNiS18 9) according to<br>DIN 17 440 (other suitable materials<br>upon request) |
| <b>Cocentricity</b>    | : Cocentricity tolerance approx.<br>0,01 mm                                                                                                           |
| <b>Surface quality</b> | : Ra = 3,2 µm (shaft)<br>Ra = 1,6 µm (taper)                                                                                                          |
| <b>Seat (bore)</b>     | : d1 = H7 (at the unslotted part)                                                                                                                     |

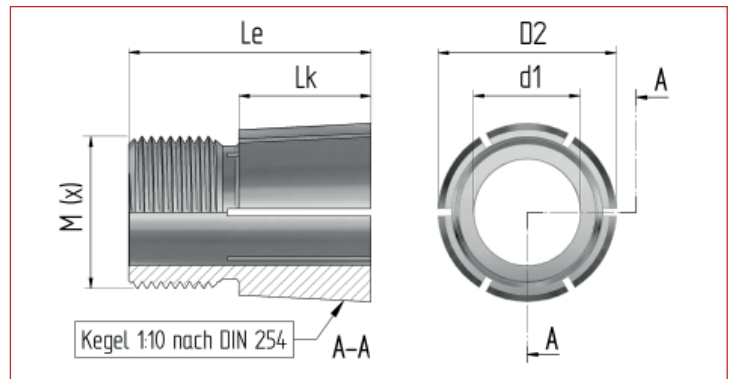

### Technical Data (individual)

| Fastening Element BOQA® Article-No.: | 10089k          | 10089k-ISK      | 10089           | 10089-ISK       | 10090           | 10090-ISK       |
|--------------------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| for shaft diameters (d1) .....       | mm 20,00        | mm 20,00        | mm 20,00        | mm 20,00        | mm 20,00        | mm 20,00        |
| Hub width (B) max. ....              | mm 16,00        | mm 16,00        | mm 22,00        | mm 22,00        | mm 28,00        | mm 28,00        |
| Taper diameter front (D2) .....      | mm 34,00        | mm 34,00        | mm 34,00        | mm 34,00        | mm 34,00        | mm 34,00        |
| Taper length (L <sub>k</sub> ) ..... | mm 12,50        | mm 12,50        | mm 18,60        | mm 18,60        | mm 23,70        | mm 23,70        |
| Counter bearing, length .....        | mm -            | mm -            | mm -            | mm -            | mm -            | mm -            |
| Counter bearing, diameter .....      | mm -            | mm -            | mm -            | mm -            | mm -            | mm -            |
| Bore depth for shaft journal .....   | mm -            | mm -            | mm -            | mm -            | mm -            | mm -            |
| Overall length (Le) .....            | mm 26,00        | mm 26,00        | mm 33,30        | mm 33,30        | mm 38,40        | mm 38,40        |
| Taper ratio (C) .....                | C=1:x 1:10      | C=1:x 1:10      | C=1:x 1:10      | C=1:x 1:10      | C=1:x 1:10      | C=1:x 1:10      |
| Taper angle (α) .....                | ° 5,725         | ° 5,725         | ° 5,725         | ° 5,725         | ° 5,725         | ° 5,725         |
| Thread (metric DIN) .....            | M (x) M30 x 1,5 | M (x) M30 x 1,5 | M (x) M30 x 1,5 | M (x) M30 x 1,5 | M (x) M30 x 1,5 | M (x) M30 x 1,5 |
| Hex socket key width (SW) .....      | mm -            | mm 10 mm        | mm -            | mm 10 mm        | mm -            | mm 10 mm        |

### Fastening Nut (standard similar to DIN 439 or DIN 936, galvanised steel / stainless steel for an additional charge)

|                                                      |                 |           |           |           |           |           |
|------------------------------------------------------|-----------------|-----------|-----------|-----------|-----------|-----------|
| Thread (metric DIN) .....                            | M (x) M30 x 1,5 | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 |
| Key width (SW) .....                                 | mm 36           | mm 36     | mm 36     | mm 36     | mm 36     | mm 36     |
| Nut height (m) .....                                 | mm 10,00        | mm 10,00  | mm 10,00  | mm 10,00  | mm 10,00  | mm 10,00  |
| Recommended tightening torque <sup>1)</sup> Nm ..... | 140,00          | 140,00    | 145,00    | 145,00    | 150,00    | 150,00    |

### Transmission Values <sup>2)</sup>

|                                |                         |                         |                         |                         |                         |                         |
|--------------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Torque (M) .....               | Nm 85,40                | Nm 85,40                | Nm 88,50                | Nm 88,50                | Nm 91,50                | Nm 91,50                |
| Thrust (F <sub>E</sub> ) ..... | kN 3,42                 | kN 3,42                 | kN 3,58                 | kN 3,58                 | kN 3,73                 | kN 3,73                 |
| Hub load (pF) .....            | N/mm <sup>2</sup> 39,03 | N/mm <sup>2</sup> 39,03 | N/mm <sup>2</sup> 27,67 | N/mm <sup>2</sup> 27,67 | N/mm <sup>2</sup> 22,82 | N/mm <sup>2</sup> 22,82 |


- 1) Values provided for the tightening torque of the nut for BOQA® fastening elements are recommended values only and lie within the lower third of the permissible range. Optimal tightening torque values for each case should be determined empirically, and should be stated explicitly in the assembly instructions.
- 2) The table values for the individual performance statistics are derived from the standard combination of steel shaft and aluminium hub (e.g., belt pulley) and therefore take the lower yield strength (Re) of the hub material into account. Values for the permissible surface pressure are based upon estimated for increasing loads. All stated values are approximate reference values. Actual performance data are determined by factors not within our control, such as shaft/hub material properties, surface quality of the shaft and bore inside the hub, permitted manufacturing tolerances, hub length, the actual tightening torque of the BOQA® fastening element fastening nut, etc..

BOQA® fastening elements are available in various lengths based on commercially available belt pulley widths and customised designs.



| Article-No.: | 10089k | 10089k-ISK | 10089 | 10089-ISK | 10090 | 10090-ISK |
|--------------|--------|------------|-------|-----------|-------|-----------|
|--------------|--------|------------|-------|-----------|-------|-----------|


The use of BOQA® fastening elements offers a series of alternatives for complex shaft-to-hub connections with a significant impact on easier assembly/disassembly, reliability and longevity of drive components.

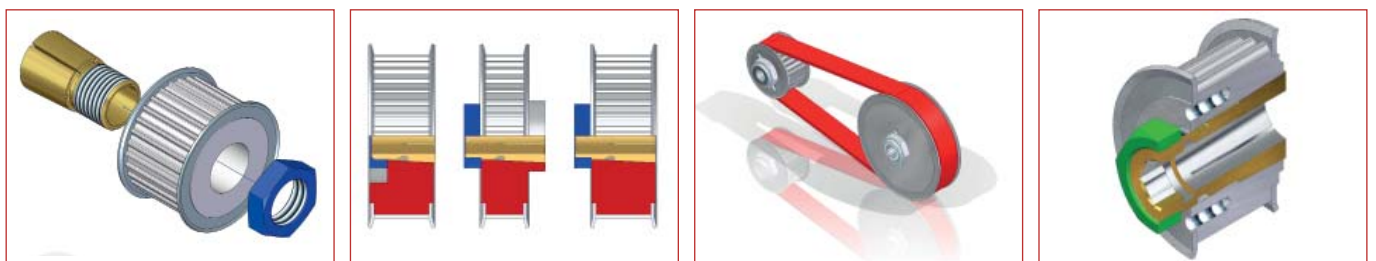

## BOQA® Fastening Elements product group 3400 for shaft diameter = 20.00 mm

### Technical Data (general)

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Material</b>        | : Preferably stainless steel<br>1.4104 (X12CrMoS17) or<br>1.4305 (X10CrNiS18 9) according to<br>DIN 17 440 (other suitable materials<br>upon request) |
| <b>Cocentricity</b>    | : Concentricity tolerance approx.<br>0,01 mm                                                                                                          |
| <b>Surface quality</b> | : $R_a = 3,2 \mu\text{m}$ (shaft)<br>$R_a = 1,6 \mu\text{m}$ (taper)                                                                                  |
| <b>Seat (bore)</b>     | : $d1 = H7$ (at the unslotted part)                                                                                                                   |

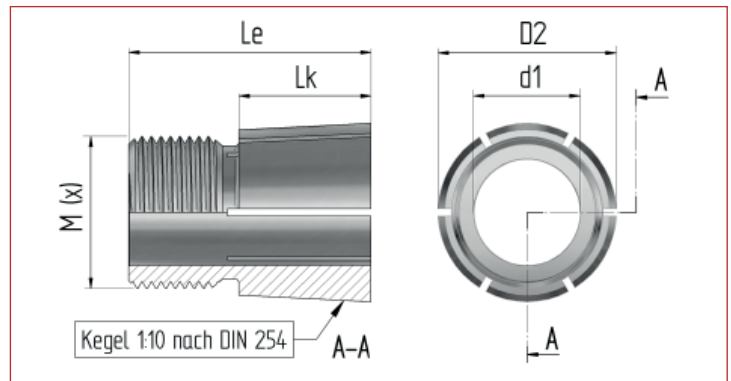

### Technical Data (individual)

| <b>Fastening Element BOQA®</b> Article-No.: |             | <b>10091</b>    | <b>10091-ISK</b> | <b>10091L</b>   | <b>10091L-ISK</b> |
|---------------------------------------------|-------------|-----------------|------------------|-----------------|-------------------|
| for shaft diameters (d1) .....              | mm .....    | 20,00 .....     | 20,00 .....      | 20,00 .....     | 20,00 .....       |
| Hub width (B) max .....                     | mm .....    | 35,00 .....     | 35,00 .....      | 40,00 .....     | 40,00 .....       |
| Taper diameter front (D2) .....             | mm .....    | 34,00 .....     | 34,00 .....      | 34,00 .....     | 34,00 .....       |
| Taper length (L <sub>k</sub> ) .....        | mm .....    | 28,20 .....     | 28,20 .....      | 33,50 .....     | 33,50 .....       |
| Counter bearing, length .....               | mm .....    | - .....         | - .....          | - .....         | - .....           |
| Counter bearing, diameter .....             | mm .....    | - .....         | - .....          | - .....         | - .....           |
| Bore depth for shaft journal .....          | mm .....    | - .....         | - .....          | - .....         | - .....           |
| Overall length (L <sub>e</sub> ) .....      | mm .....    | 46,00 .....     | 46,00 .....      | 51,50 .....     | 51,50 .....       |
| Taper ratio (C) .....                       | C=1:x ..... | 1:10 .....      | 1:10 .....       | 1:10 .....      | 1:10 .....        |
| Taper angle (α) .....                       | ° .....     | 5,725 .....     | 5,725 .....      | 5,725 .....     | 5,725 .....       |
| Thread (metric DIN) .....                   | M (x) ..... | M30 x 1,5 ..... | M30 x 1,5 .....  | M30 x 1,5 ..... | M30 x 1,5 .....   |
| Hex socket key width (SW) .....             | mm .....    | - .....         | 10 mm .....      | - .....         | 10 mm .....       |

### Fastening Nut (standard similar to DIN 439 or DIN 936, galvanised steel / stainless steel for an additional charge)

|                                             |       |           |           |           |           |
|---------------------------------------------|-------|-----------|-----------|-----------|-----------|
| Thread (metric DIN)                         | M (x) | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 |
| Key width (SW)                              | mm    | 36        | 36        | 36        | 36        |
| Höhe der Mutter (m)                         | mm    | 10,00     | 10,00     | 10,00     | 10,00     |
| Recommended tightening torque <sup>1)</sup> | Nm    | 155,00    | 155,00    | 160,00    | 160,00    |

### Transmission Values <sup>2)</sup>

|                    |                   |       |       |       |       |
|--------------------|-------------------|-------|-------|-------|-------|
| Torque (M)         | Nm                | 94,60 | 94,60 | 97,60 | 97,60 |
| Thrust ( $F_E$ )   | kN                | 3,88  | 3,88  | 4,04  | 4,04  |
| Hub load ( $p_F$ ) | N/mm <sup>2</sup> | 20,09 | 20,09 | 17,74 | 17,74 |


- Values provided for the tightening torque of the nut for BOQA® fastening elements are recommended values only and lie within the lower third of the permissible range. Optimal tightening torque values for each case should be determined empirically, and should be stated explicitly in the assembly instructions.
- The table values for the individual performance statistics are derived from the standard combination of steel shaft and aluminium hub (e.g., belt pulley) and therefore take the lower yield strength ( $R_e$ ) of the hub material into account. Values for the permissible surface pressure are based upon estimated for increasing loads. All stated values are approximate reference values. Actual performance data are determined by factors not within our control, such as shaft/hub material properties, surface quality of the shaft and bore inside the hub, permitted manufacturing tolerances, hub length, the actual tightening torque of the BOQA® fastening element fastening nut, etc..

BOQA® fastening elements are available in various lengths based on commercially available belt pulley widths and customised designs.



|                     |       |           |        |            |
|---------------------|-------|-----------|--------|------------|
| <b>Article-No.:</b> | 10091 | 10091-ISK | 10091L | 10091L-ISK |
|---------------------|-------|-----------|--------|------------|

The use of BOQA® fastening elements offers a series of alternatives for complex shaft-to-hub connections with a significant impact on easier assembly/disassembly, reliability and longevity of drive components.

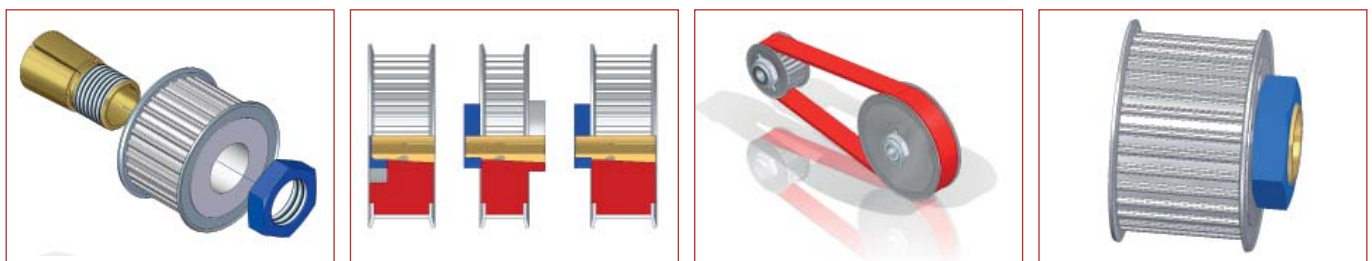




## BOQA® Fastening Elements product group 3400 for shaft diameter = 21.00 mm

### Technical Data (general)

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Material</b>        | : Preferably stainless steel<br>1.4104 (X12CrMoS17) or<br>1.4305 (X10CrNiS18 9) according to<br>DIN 17 440 (other suitable materials<br>upon request) |
| <b>Cocentricity</b>    | : Cocentricity tolerance approx.<br>0,01 mm                                                                                                           |
| <b>Surface quality</b> | : $R_a = 3,2 \mu\text{m}$ (shaft)<br>$R_a = 1,6 \mu\text{m}$ (taper)                                                                                  |
| <b>Seat (bore)</b>     | : $d1 = H7$ (at the unslotted part)                                                                                                                   |

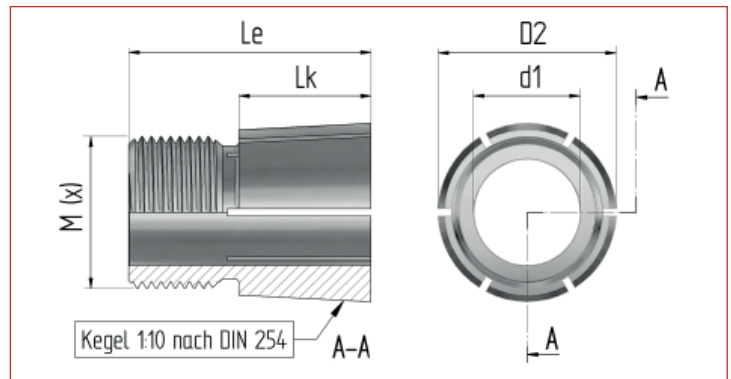

### Technical Data (individual)

| <b>Fastening Element BOQA®</b> Article-No.: | <b>10097</b> | <b>10097-ISK</b> | <b>10097L</b> | <b>10097L-ISK</b> |
|---------------------------------------------|--------------|------------------|---------------|-------------------|
| for shaft diameters (d1).....mm             | 21,00        | 21,00            | 21,00         | 21,00             |
| Hub width (B) max.....mm                    | 35,00        | 35,00            | 40,00         | 40,00             |
| Taper diameter front (D2).....mm            | 34,00        | 34,00            | 34,00         | 34,00             |
| Taper length (L <sub>k</sub> ).....mm       | 28,20        | 28,20            | 33,50         | 33,50             |
| Counter bearing, length.....mm              | -            | -                | -             | -                 |
| Counter bearing, diameter.....mm            | -            | -                | -             | -                 |
| Bore depth for shaft journal.....mm         | -            | -                | -             | -                 |
| Overall length (L <sub>e</sub> ).....mm     | 46,00        | 46,00            | 51,50         | 51,50             |
| Taper ratio (C).....C=1:x                   | 1:10         | 1:10             | 1:10          | 1:10              |
| Taper angle (α).....°                       | 5,725        | 5,725            | 5,725         | 5,725             |
| Thread (metric DIN).....M (x)               | M30 x 1,5    | M30 x 1,5        | M30 x 1,5     | M30 x 1,5         |
| Hex socket key width (SW).....mm            | -            | 10 mm            | -             | 10 mm             |

### Fastening Nut (standard similar to DIN 439 or DIN 936, galvanised steel / stainless steel for an additional charge)

|                                             |       |           |           |           |           |
|---------------------------------------------|-------|-----------|-----------|-----------|-----------|
| Thread (metric DIN)                         | M (x) | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 |
| Key width (SW)                              | mm    | 36        | 36        | 36        | 36        |
| Nut height (m)                              | mm    | 10,00     | 10,00     | 10,00     | 10,00     |
| Recommended tightening torque <sup>1)</sup> | Nm    | 160,00    | 160,00    | 165,00    | 165,00    |

### Transmission Values <sup>2)</sup>

|                    |                   |       |       |        |        |
|--------------------|-------------------|-------|-------|--------|--------|
| Torque (M)         | Nm                | 97,60 | 97,60 | 100,70 | 100,70 |
| Thrust ( $F_E$ )   | kN                | 4,01  | 4,01  | 4,17   | 4,17   |
| Hub load ( $p_F$ ) | N/mm <sup>2</sup> | 20,74 | 20,74 | 18,30  | 18,30  |


- 1) Values provided for the tightening torque of the nut for BOQA® fastening elements are recommended values only and lie within the lower third of the permissible range. Optimal tightening torque values for each case should be determined empirically, and should be stated explicitly in the assembly instructions.
- 2) The table values for the individual performance statistics are derived from the standard combination of steel shaft and aluminium hub (e.g., belt pulley) and therefore take the lower yield strength ( $R_e$ ) of the hub material into account. Values for the permissible surface pressure are based upon estimated for increasing loads. All stated values are approximate reference values. Actual performance data are determined by factors not within our control, such as shaft/hub material properties, surface quality of the shaft and bore inside the hub, permitted manufacturing tolerances, hub length, the actual tightening torque of the BOQA® fastening element fastening nut, etc..

BOQA® fastening elements are available in various lengths based on commercially available belt pulley widths and customised designs.



|                     |       |           |        |            |
|---------------------|-------|-----------|--------|------------|
| <b>Article-No.:</b> | 10097 | 10097-ISK | 10097L | 10097L-ISK |
|---------------------|-------|-----------|--------|------------|

The use of BOQA® fastening elements offers a series of alternatives for complex shaft-to-hub connections with a significant impact on easier assembly/disassembly, reliability and longevity of drive components.

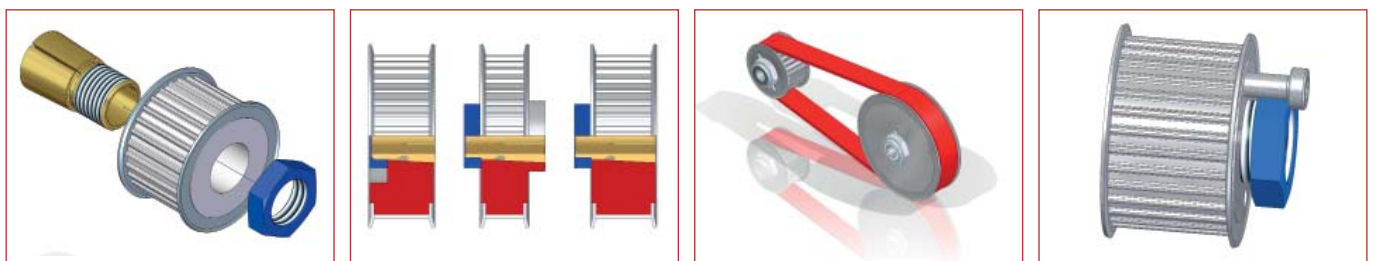






Technical drawing of a tapered roller bearing. The left view is a side cross-section showing the outer ring with outer diameter  $D_2$  and inner diameter  $d_1$ . The total width is  $Le$ , and the width of the tapered roller set is  $L_k$ . The right view is a cross-section of the tapered roller set, showing the outer diameter  $D_2$  and inner diameter  $d_1$ . The cross-section is labeled  $A-A$ . A label at the bottom left indicates the taper: **Kegel 1:10 nach DIN 254**.

DBGM : 94 07 845 / 94 10 725  
DBP : 44 16 292.8  
BodaTec-Form-Nr.: boqa2016.idd  
© Georg F. Boda : bodaTec® GmbH 72648

## BOQA® Fastening Elements product group 3400 for shaft diameter = 24.00 mm

### Technical Data (general)

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Material</b>        | : Preferably stainless steel<br>1.4104 (X12CrMoS17) or<br>1.4305 (X10CrNiS18 9) according to<br>DIN 17 440 (other suitable materials<br>upon request) |
| <b>Cocentricity</b>    | : Cocentricity tolerance approx.<br>0,01 mm                                                                                                           |
| <b>Surface quality</b> | : $R_a = 3,2 \mu\text{m}$ (shaft)<br>$R_a = 1,6 \mu\text{m}$ (taper)                                                                                  |
| <b>Seat (bore)</b>     | : $d1 = H7$ (at the unslotted part)                                                                                                                   |

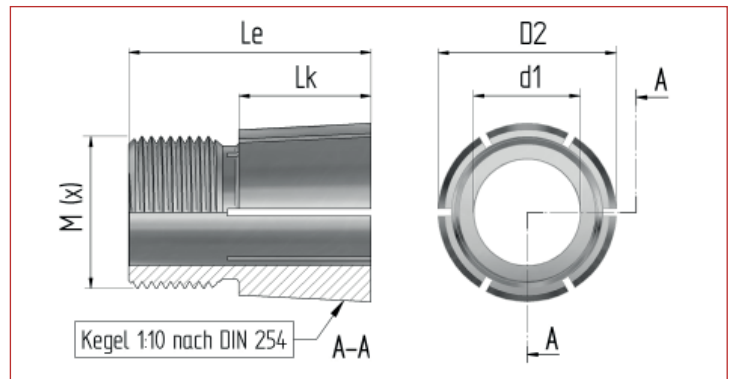

### Technical Data (individual)

| <b>Fastening Element BOQA®</b> Article-No.: |             | <b>10109</b>    | <b>10109-ISK</b> | <b>10109L</b>   | <b>10109L-ISK</b> |
|---------------------------------------------|-------------|-----------------|------------------|-----------------|-------------------|
| for shaft diameters (d1) .....              | mm .....    | 24,00 .....     | 24,00 .....      | 24,00 .....     | 24,00 .....       |
| Hub width (B) max .....                     | mm .....    | 35,00 .....     | 35,00 .....      | 40,00 .....     | 40,00 .....       |
| Taper diameter front (D2) .....             | mm .....    | 34,00 .....     | 34,00 .....      | 34,00 .....     | 34,00 .....       |
| Taper length (L <sub>k</sub> ) .....        | mm .....    | 28,20 .....     | 28,20 .....      | 33,50 .....     | 33,50 .....       |
| Counter bearing, length .....               | mm .....    | - .....         | - .....          | - .....         | - .....           |
| Counter bearing, diameter .....             | mm .....    | - .....         | - .....          | - .....         | - .....           |
| Bore depth for shaft journal .....          | mm .....    | - .....         | - .....          | - .....         | - .....           |
| Overall length (L <sub>e</sub> ) .....      | mm .....    | 46,00 .....     | 46,00 .....      | 51,50 .....     | 51,50 .....       |
| Taper ratio (C) .....                       | C=1:x ..... | 1:10 .....      | 1:10 .....       | 1:10 .....      | 1:10 .....        |
| Taper angle (α) .....                       | ° .....     | 5,725 .....     | 5,725 .....      | 5,725 .....     | 5,725 .....       |
| Thread (metric DIN) .....                   | M (x) ..... | M30 x 1,5 ..... | M30 x 1,5 .....  | M30 x 1,5 ..... | M30 x 1,5 .....   |
| Hex socket key width (SW) .....             | mm .....    | - .....         | 10 mm .....      | - .....         | 10 mm .....       |

### Fastening Nut (standard similar to DIN 439 or DIN 936, galvanised steel / stainless steel for an additional charge)

|                                             |       |           |           |           |           |
|---------------------------------------------|-------|-----------|-----------|-----------|-----------|
| Thread (metric DIN)                         | M (x) | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 |
| Key width (SW)                              | mm    | 36        | 36        | 36        | 36        |
| Nut height (m)                              | mm    | 10,00     | 10,00     | 10,00     | 10,00     |
| Recommended tightening torque <sup>1)</sup> | Nm    | 170,00    | 170,00    | 175,00    | 175,00    |

### Transmission Values <sup>2)</sup>

|                    |                   |        |        |        |        |
|--------------------|-------------------|--------|--------|--------|--------|
| Torque (M)         | Nm                | 103,70 | 103,70 | 106,80 | 106,80 |
| Thrust ( $F_E$ )   | kN                | 4,26   | 4,26   | 4,42   | 4,42   |
| Hub load ( $p_F$ ) | N/mm <sup>2</sup> | 22,03  | 22,03  | 19,41  | 19,41  |


- 1) Values provided for the tightening torque of the nut for BOQA® fastening elements are recommended values only and lie within the lower third of the permissible range. Optimal tightening torque values for each case should be determined empirically, and should be stated explicitly in the assembly instructions.
- 2) The table values for the individual performance statistics are derived from the standard combination of steel shaft and aluminium hub (e.g., belt pulley) and therefore take the lower yield strength ( $R_e$ ) of the hub material into account. Values for the permissible surface pressure are based upon estimated for increasing loads. All stated values are approximate reference values. Actual performance data are determined by factors not within our control, such as shaft/hub material properties, surface quality of the shaft and bore inside the hub, permitted manufacturing tolerances, hub length, the actual tightening torque of the BOQA® fastening element fastening nut, etc..

BOQA® fastening elements are available in various lengths based on commercially available belt pulley widths and customised designs.



|                     |       |           |        |            |
|---------------------|-------|-----------|--------|------------|
| <b>Article-No.:</b> | 10109 | 10109-ISK | 10109L | 10109L-ISK |
|---------------------|-------|-----------|--------|------------|


The use of BOQA® fastening elements offers a series of alternatives for complex shaft-to-hub connections with a significant impact on easier assembly/disassembly, reliability and longevity of drive components.

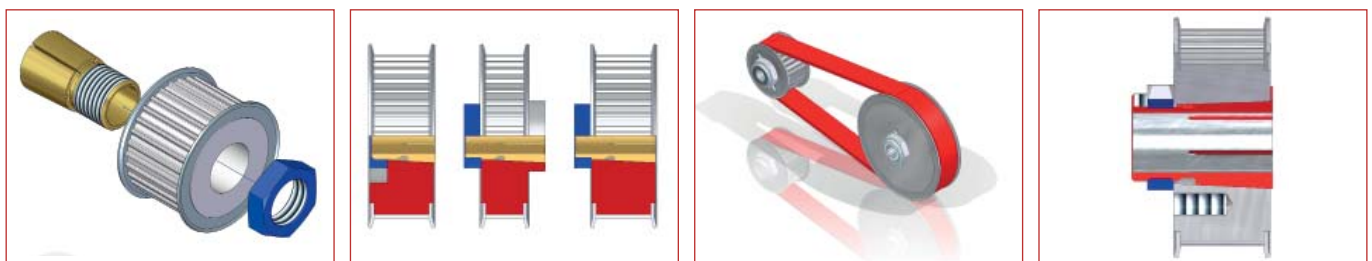

## BOQA® Fastening Elements product group 3400 for shaft diameter = 25.00 mm

### Technical Data (general)

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Material</b>        | : Preferably stainless steel<br>1.4104 (X12CrMoS17) or<br>1.4305 (X10CrNiS18 9) according to<br>DIN 17 440 (other suitable materials<br>upon request) |
| <b>Cocentricity</b>    | : Cocentricity tolerance approx.<br>0,01 mm                                                                                                           |
| <b>Surface quality</b> | : Ra = 3,2 µm (shaft)<br>Ra = 1,6 µm (taper)                                                                                                          |
| <b>Seat (bore)</b>     | : d1 = H7 (at the unslotted part)                                                                                                                     |

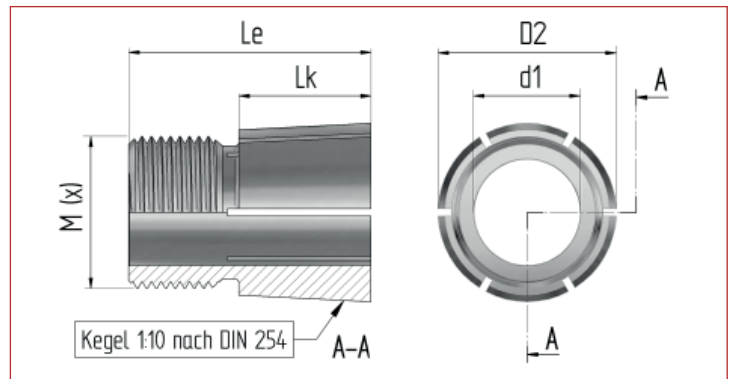

### Technical Data (individual)

| Fastening Element BOQA® Article-No.: | 10107k-25       | 10107k-25-ISK   | 10107-25        | 10107-25-ISK    | 10108-25        | 10108-25-ISK    |
|--------------------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| for shaft diameters (d1) .....       | mm 25,00        | mm 25,00        | mm 25,00        | mm 25,00        | mm 25,00        | mm 25,00        |
| Hub width (B) max. ....              | mm 16,00        | mm 16,00        | mm 22,00        | mm 22,00        | mm 28,00        | mm 28,00        |
| Taper diameter front (D2) .....      | mm 34,00        | mm 34,00        | mm 34,00        | mm 34,00        | mm 34,00        | mm 34,00        |
| Taper length (L <sub>k</sub> ) ..... | mm 12,50        | mm 12,50        | mm 18,60        | mm 18,60        | mm 23,70        | mm 23,70        |
| Counter bearing, length .....        | mm -            | mm -            | mm -            | mm -            | mm -            | mm -            |
| Counter bearing, diameter .....      | mm -            | mm -            | mm -            | mm -            | mm -            | mm -            |
| Bore depth for shaft journal .....   | mm -            | mm -            | mm -            | mm -            | mm -            | mm -            |
| Overall length (Le) .....            | mm 26,00        | mm 26,00        | mm 33,30        | mm 33,30        | mm 38,40        | mm 38,40        |
| Taper ratio (C) .....                | C=1:x 1:10      | C=1:x 1:10      | C=1:x 1:10      | C=1:x 1:10      | C=1:x 1:10      | C=1:x 1:10      |
| Taper angle (α) .....                | ° 5,725         | ° 5,725         | ° 5,725         | ° 5,725         | ° 5,725         | ° 5,725         |
| Thread (metric DIN) .....            | M (x) M30 x 1,5 | M (x) M30 x 1,5 | M (x) M30 x 1,5 | M (x) M30 x 1,5 | M (x) M30 x 1,5 | M (x) M30 x 1,5 |
| Hex socket key width (SW) .....      | mm -            | mm 10 mm        | mm -            | mm 10 mm        | mm -            | mm 10 mm        |

### Fastening Nut (standard similar to DIN 439 or DIN 936, galvanised steel / stainless steel for an additional charge)

|                                                      |                 |           |           |           |           |           |
|------------------------------------------------------|-----------------|-----------|-----------|-----------|-----------|-----------|
| Thread (metric DIN) .....                            | M (x) M30 x 1,5 | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 |
| Key width (SW) .....                                 | mm 36           | mm 36     | mm 36     | mm 36     | mm 36     | mm 36     |
| Nut height (m) .....                                 | mm 10,00        | mm 10,00  | mm 10,00  | mm 10,00  | mm 10,00  | mm 10,00  |
| Recommended tightening torque <sup>1)</sup> Nm ..... | 160,00          | 160,00    | 165,00    | 165,00    | 170,00    | 170,00    |

### Transmission Values <sup>2)</sup>

|                                |             |             |             |             |             |             |
|--------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Torque (M) .....               | Nm 97,60    | Nm 97,60    | Nm 100,70   | Nm 100,70   | Nm 103,70   | Nm 103,70   |
| Thrust (F <sub>e</sub> ) ..... | kN 3,91     | kN 3,91     | kN 4,07     | kN 4,07     | kN 4,23     | kN 4,23     |
| Hub load (pF) .....            | N/mm² 44,61 | N/mm² 44,61 | N/mm² 31,49 | N/mm² 31,49 | N/mm² 25,86 | N/mm² 25,86 |


- 1) Values provided for the tightening torque of the nut for BOQA® fastening elements are recommended values only and lie within the lower third of the permissible range. Optimal tightening torque values for each case should be determined empirically, and should be stated explicitly in the assembly instructions.
- 2) The table values for the individual performance statistics are derived from the standard combination of steel shaft and aluminium hub (e.g., belt pulley) and therefore take the lower yield strength (Re) of the hub material into account. Values for the permissible surface pressure are based upon estimated for increasing loads. All stated values are approximate reference values. Actual performance data are determined by factors not within our control, such as shaft/hub material properties, surface quality of the shaft and bore inside the hub, permitted manufacturing tolerances, hub length, the actual tightening torque of the BOQA® fastening element fastening nut, etc..

BOQA® fastening elements are available in various lengths based on commercially available belt pulley widths and customised designs.



| Article-No.: | 10107k-25 | 10107k-25-ISK | 10107-25 | 10107-25-ISK | 10108-25 | 10108-25-ISK |
|--------------|-----------|---------------|----------|--------------|----------|--------------|
|--------------|-----------|---------------|----------|--------------|----------|--------------|


The use of BOQA® fastening elements offers a series of alternatives for complex shaft-to-hub connections with a significant impact on easier assembly/disassembly, reliability and longevity of drive components.

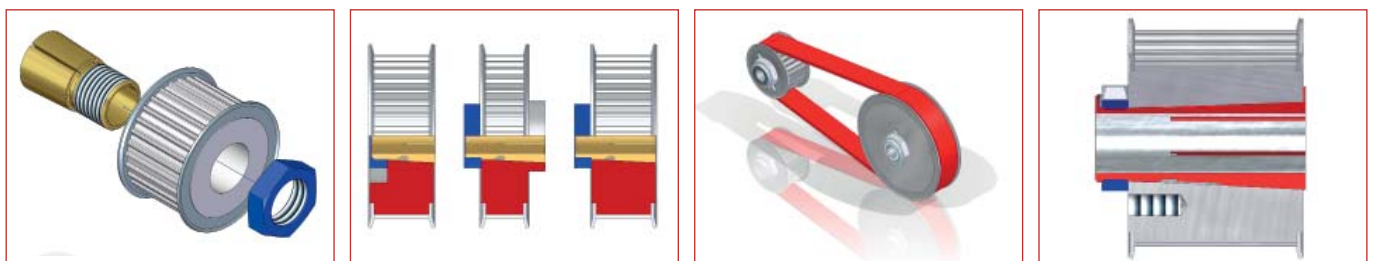

## BOQA® Fastening Elements product group 3400 for shaft diameter = 25.00 mm

### Technical Data (general)

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Material</b>        | : Preferably stainless steel<br>1.4104 (X12CrMoS17) or<br>1.4305 (X10CrNiS18 9) according to<br>DIN 17 440 (other suitable materials<br>upon request) |
| <b>Cocentricity</b>    | : Cocentricity tolerance approx.<br>0,01 mm                                                                                                           |
| <b>Surface quality</b> | : $R_a = 3,2 \mu\text{m}$ (shaft)<br>$R_a = 1,6 \mu\text{m}$ (taper)                                                                                  |
| <b>Seat (bore)</b>     | : $d1 = H7$ (at the unslotted part)                                                                                                                   |

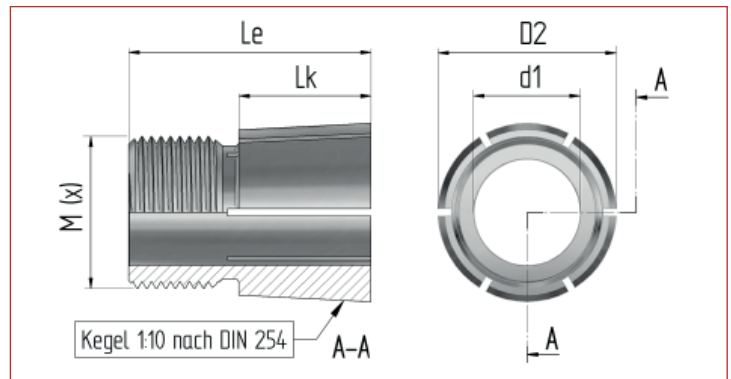

### Technical Data (individual)

| <b>Fastening Element BOQA®</b> Article-No.: |             | 10109-25  | 10109-25-ISK | 10109-25L | 10109-25L-ISK |
|---------------------------------------------|-------------|-----------|--------------|-----------|---------------|
| for shaft diameters (d1) .....              | mm .....    | 25,00     | 25,00        | 25,00     | 25,00         |
| Hub width (B) max.....                      | mm .....    | 35,00     | 35,00        | 40,00     | 40,00         |
| Taper diameter front (D2).....              | mm .....    | 34,00     | 34,00        | 34,00     | 34,00         |
| Taper length (L <sub>k</sub> ) .....        | mm .....    | 28,20     | 28,20        | 33,50     | 33,50         |
| Counter bearing, length.....                | mm .....    | -         | -            | -         | -             |
| Counter bearing, diameter.....              | mm .....    | -         | -            | -         | -             |
| Bore depth for shaft journal .....          | mm .....    | -         | -            | -         | -             |
| Overall length (L <sub>e</sub> ) .....      | mm .....    | 46,00     | 46,00        | 51,50     | 51,50         |
| Taper ratio (C) .....                       | C=1:x ..... | 1:10      | 1:10         | 1:10      | 1:10          |
| Taper angle (α) .....                       | ° .....     | 5,725     | 5,725        | 5,725     | 5,725         |
| Thread (metric DIN).....                    | M (x) ..... | M30 x 1,5 | M30 x 1,5    | M30 x 1,5 | M30 x 1,5     |
| Hex socket key width (SW) .....             | mm .....    | -         | 10 mm        | -         | 10 mm         |

### Fastening Nut (standard similar to DIN 439 or DIN 936, galvanised steel / stainless steel for an additional charge)

|                                             |       |           |           |           |           |
|---------------------------------------------|-------|-----------|-----------|-----------|-----------|
| Thread (metric DIN)                         | M (x) | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 | M30 x 1,5 |
| Key width (SW)                              | mm    | 36        | 36        | 36        | 36        |
| Nut height (m)                              | mm    | 10,00     | 10,00     | 10,00     | 10,00     |
| Recommended tightening torque <sup>1)</sup> | Nm    | 175,00    | 175,00    | 180,00    | 180,00    |

### Transmission Values <sup>2)</sup>

|                    |                   |        |        |        |        |
|--------------------|-------------------|--------|--------|--------|--------|
| Torque (M)         | Nm                | 106,80 | 106,80 | 109,80 | 109,80 |
| Thrust ( $F_e$ )   | kN                | 4,38   | 4,38   | 4,54   | 4,54   |
| Hub load ( $p_F$ ) | N/mm <sup>2</sup> | 22,68  | 22,68  | 19,96  | 19,96  |

- 1) Values provided for the tightening torque of the nut for BOQA® fastening elements are recommended values only and lie within the lower third of the permissible range. Optimal tightening torque values for each case should be determined empirically, and should be stated explicitly in the assembly instructions.
- 2) The table values for the individual performance statistics are derived from the standard combination of steel shaft and aluminium hub (e.g., belt pulley) and therefore take the lower yield strength ( $R_e$ ) of the hub material into account. Values for the permissible surface pressure are based upon estimated for increasing loads. All stated values are approximate reference values. Actual performance data are determined by factors not within our control, such as shaft/hub material properties, surface quality of the shaft and bore inside the hub, permitted manufacturing tolerances, hub length, the actual tightening torque of the BOQA® fastening element fastening nut, etc..

BOQA® fastening elements are available in various lengths based on commercially available belt pulley widths and customised designs.



|                     |          |              |           |               |
|---------------------|----------|--------------|-----------|---------------|
| <b>Article-No.:</b> | 10109-25 | 10109-25-ISK | 10109-25L | 10109-25L-ISK |
|---------------------|----------|--------------|-----------|---------------|

The use of BOQA® fastening elements offers a series of alternatives for complex shaft-to-hub connections with a significant impact on easier assembly/disassembly, reliability and longevity of drive components.

